


# EPORITE

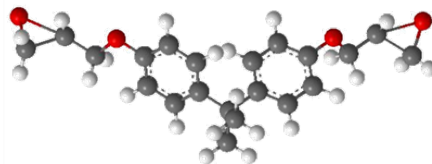

## EPORITE TIM-1101

### DESCRIPTION

EPORITE TIM-1101 is a silicone -containing and solvent-free thermal conductive grease. Because of the excellent thermal conductivity, they are recommended for being a medium between heat sinks and processors (such as CPU) for effectively improving processing. Additionally, EPORITE TIM-1101 displays a very low thermal resistance, a facile operation, an excellent reliability and stability.

### FEATURES

- ✓ Low thermal resistance
- ✓ High reliability and stability
- ✓ Easy operation
- ✓ Non-dry out
- ✓ Nonelectric
- ✓ Pump out resistant
- ✓ RoHS Certificated

### APPLICATION

- ✓ CPU
- ✓ MOS
- ✓ LED
- ✓ Microprocessor
- ✓ Heat sink
- ✓ Graphic card
- ✓ Power
- ✓ Relay

### APPLICATION METHOD

- ✓ Screen printing
- ✓ Pad printing

### STORAGE

Seal the container tightly and place at room temperature can be stored for one year.

### SPECIFICATION

Property	EPORITE TIM-1101
Color	White
Specific gravity (ASTM D1475)	2.8 ± 0.2
Viscosity (25°C)	High Viscosity Paste
Consistency (ASTM D217)	280 mm
Thermal conductivity (ASTM D5470)	2.56 W/m°C
Thermal impedance (ASTM D5470)	0.014 ~ 0.020°C-in <sup>2</sup> /W
Volatile Content (240 hrs at 100°C)	0.08%
Oil separation (24 hrs at 150°C)	< 0.1%
Dielectric strength	10 kV/mm

### REMARK

The information contained is believed to be reliable and only for the reference without any effective guarantee for the application of the user. The user is responsible to determine the suitability for the user's application and the reliability of the products. Epolab Chemical will not accept claim of warranties of the fitness or reliability for a particular purpose especially the liability for consequential damages of end products.



EPOLAB CHEMICAL INDUSTRIES INC.

No. 11, Ho-Jiun N. Rd., Chung-Li Ind. Park, Chung-Li, Taoyuan 320, Taiwan

Tel : 886-3- 4521501~3 Fax : 886-3-4529318 [service@epolab.com.tw](mailto:service@epolab.com.tw) [www.epolab.com](http://www.epolab.com)